
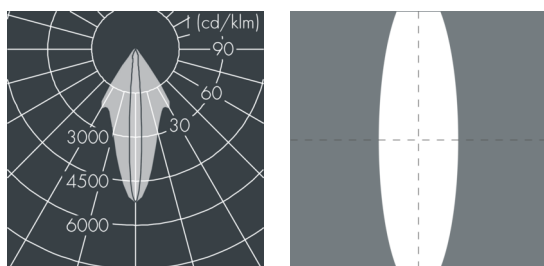


## Minispot 2 - 48 V

8 925 047 329

8 W, 484 lm, 2700 K warm white, Casambi,  
linear vertical  $34^\circ / 7^\circ$

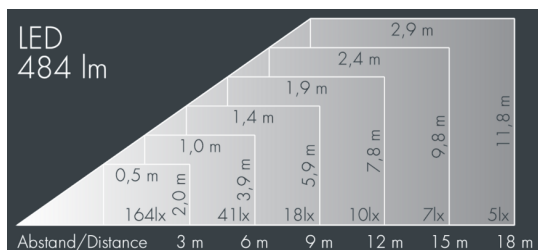

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole  $\varnothing 7$  mm, spacing 18 mm, 1 center hole  $\varnothing 8.5$  mm, tilt range:  $185^\circ$ , cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, Radial louvre, Constant current control (48 V DC), CRI > 80, 3, service life  $L_{90/B_{10}} > 50.000$  h, Beam angle (FWHM):  $34^\circ / 7^\circ$ , luminous flux: 484 lm, wattage: 8 W, delivered lumens 60 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,01 m<sup>2</sup>, dimensions:  $\varnothing 80$  mm, width 121 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP65 IK08

## Specification

|                       |                            |                             |                                   |
|-----------------------|----------------------------|-----------------------------|-----------------------------------|
| Wattage               | 8 W                        | Beam angle (FWHM)           | $34^\circ / 7^\circ$              |
| Delivered lumens      | 60 lm/W                    | Housing colour              | black RAL 7021                    |
| Light source          | LED 2700 K                 | Power supply cable          | $\varnothing 6 - 11$ mm           |
| Color Rendering Index | CRI > 80                   | Protection type             | IP65                              |
| Colour tolerance      | 3                          | Protection class            | III                               |
| Lifetime ta 25° C     | $L_{90/B_{10}} > 50.000$ h | Impact resistance           | IK08                              |
| Control gear          | Casambi                    | Windage area                | 0,01 m <sup>2</sup>               |
| Input voltage DC      | 48                         | Dimensions                  | $\varnothing 80$ mm, width 121 mm |
|                       |                            | Weight                      | 0,80 kg                           |
|                       |                            | Max. ambient temperature ta | $35^\circ$                        |