
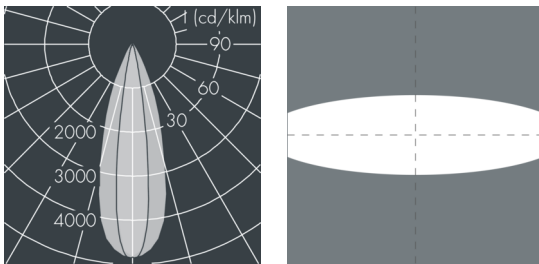


## Monocube 4 RGBW

8 264 259 039

5 × max. W47 W, 1753 lm,  
RGBW (3000 K) warm white, DMX,  
linear, horizontal 16° / 33°

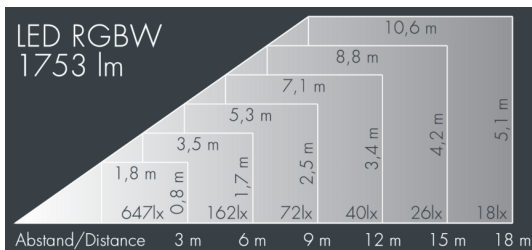

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification

|                            |                      |                             |                     |
|----------------------------|----------------------|-----------------------------|---------------------|
| Wattage                    | 48 W                 | Beam angle (FWHM)           | 16° / 33°           |
| Delivered lumens           | 37 lm/W              | Housing colour              | silver grey         |
| Light source               | LED RGBW (3000 K)    | Power supply cable          | Ø 6 – 13 mm         |
| Lifetime ta 25° C          | L70/B20 > 50.000 h   | Protection type             | IP65                |
| Control gear               | DMX                  | Protection class            | I                   |
| Input voltage AC           | 120 – 250 V          | Impact resistance           | IK08                |
| Input voltage DC           | 120 – 250 V          | Windage area                | 0,022m <sup>2</sup> |
| Voltage protection         | ± kV L/N   ± kV L/PE | Dimensions                  | 152 × 120 × 152 mm  |
| Luminaires per B16A / C16A | 38 / 45              | Weight                      | 2,70 kg             |
|                            |                      | Max. ambient temperature ta | 35°                 |

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: 2 × M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 16° / 33°, luminous flux: 1753 lm, wattage: 48 W, delivered lumens 37 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,022 m<sup>2</sup>, dimensions (L×H×W): 152 × 120 × 152 mm, weight 2.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08