
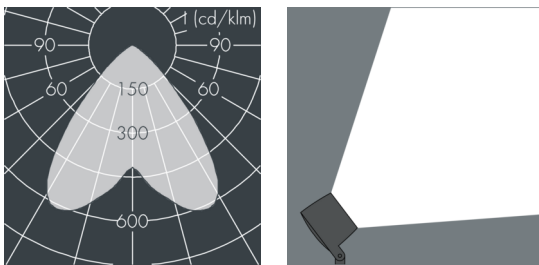


Monospot S4

8 994 265 159

45 W, 3958 lm, 4000 K neutral white, DALI,
wide beam (with indirect reflector)

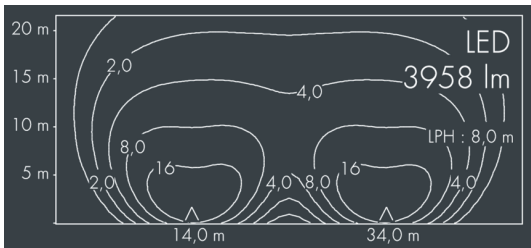

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles \varnothing 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes \varnothing 9 mm, spacing 95 mm, 1 centre hole \varnothing 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80, luminous flux: 3958 lm, wattage: 45 W, delivered lumens 87 lm/W, protection type IP67, protection class I, impact resistance IK08, dimensions: \varnothing 194 mm, width 124 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



 IP 67 IK08

Specification

Wattage	45 W	Housing colour	white RAL 9002
Delivered lumens	87 lm/W	Protection type	IP67
Light source	LED 4000 K	Protection class	I
Color Rendering Index	CRI > 80	Impact resistance	IK08
Control gear	DALI	Dimensions	\varnothing 194 mm, width 124 mm
		Weight	3,00 kg