



Nightpath LED 8 304 6.6 .0.
 Wegeleuchte 8 304 6.6 .1.
 Bollard light 8 304 1.6 .0.
 8 304 1.6 .1.

Schutzart - Protection IP 65, IK08
 Schutzklasse - Safety Class I



MONTAGE ANLEITUNG

MOUNTING INSTRUCTIONS




WILLY MEYER & SOHN GMBH & CO.KG
 LICHTTECHNISCHE SPEZIALFABRIK
 Stemmessiepener Weg 5 • D-58675 Hemer

Wegeleuchte
 mit Hochleistungs-LED,
 5 x LED 2,5 Watt.

Bollard light
 with high performance LED,
 5 x LED 2,5 Watt.

MONTAGEHINWEISE


Anschluß der Leuchte nach VDE 0100.
 Leuchte ist geeignet für die Montage auf
 normal entflammaren Baustoffen.
 Vor dem Öffnen der Leuchte Netzspannung
 trennen.
 Standrohr nach lösen der Senkschrauben **(A)**
 von der Fußplatte **(B)** ziehen.
 Fußplatte auf einem Fundament oder
 Erdstück ausrichten und festschrauben.
 Elektrischen Anschluss vornehmen.
 Standrohr mit Fußplatte verschrauben.
 Das Glas ist ein Einscheiben-Sicherheits-
 Hartglas.



Die Leuchte darf nur mit ihren vollständigen
 Schutzabdeckungen betrieben werden.


Leuchte	Gewicht	Windangriffsfläche
8 304 6.6 ...	6,2 kg	0,11 m ²
8 304 1.6 ...	8,7 kg	0,18 m ²

In Strahlrichtung den Mindestabstand zu
 angestrahlten Flächen einhalten !



MOUNTING INSTRUCTIONS




Connection of light fitting in compliance with
 the prevailing regulations in your country.
 Luminaire is suitable for mounting on
 normal inflammable building materials.
 Disconnect from power supply before
 opening luminaire.
 Loosen the counter sunk screws **(A)**
 and remove the post from the base plate **(B)**.
 Mount the base plate onto a concrete base
 or attach to a buried extension piece and
 screw down firmly. Make electrical
 connection. Put post back onto base plate
 and tighten the counter sunk screws.
 The glass is tempered safety glass.



Luminaire may be operated only when all
 protective covers are in place.

Luminaire	Weight	Projected area
8 304 6.6 ...	6.2 kg	0.11 m ²
8 304 1.6 ...	8.7 kg	0.18 m ²

Ensure that the minimum distance between
 luminaire and illuminated surface is observed.

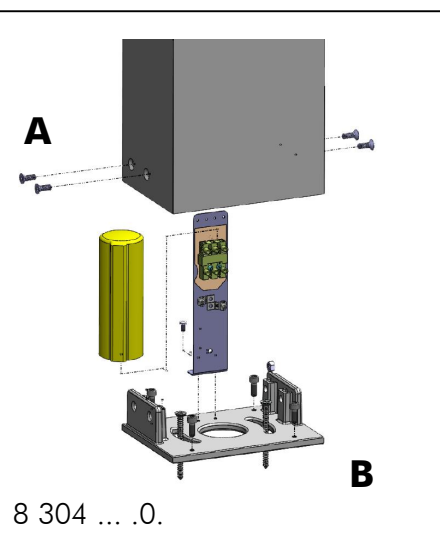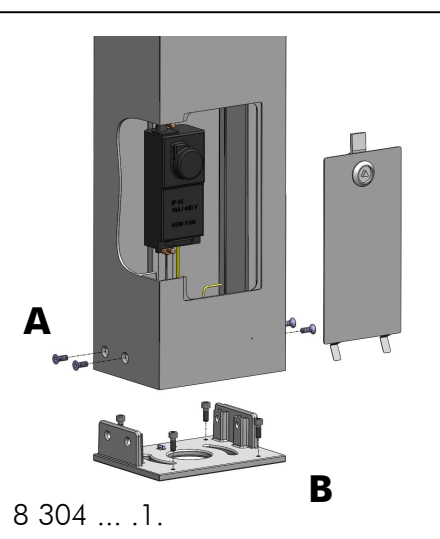

Leuchte	Höhe L1
8 304 6.6 ð	600 mm
8 304 1.6 ð	1000 mm

Luminaire	Height L1
8 304. 6.6 ð	600 mm
8 304. 1.6 ð	1000 mm

