





## Ecoline

8 792 349 009

15 × 4 W, 3352 lm, RGBW all colours DMX,  
wall washer 17° / 87°

L1 = 1562 mm, L2 = 1515 mm

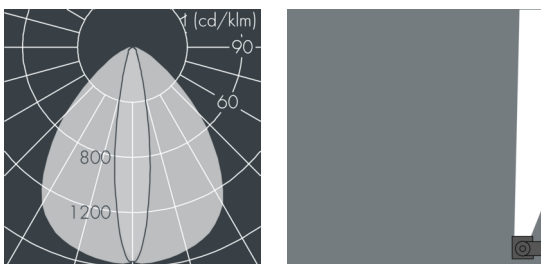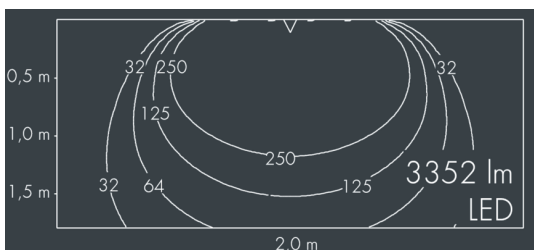

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, UV stabilised, impact-resistant polycarbonate cover with partial frosting for uniform light diffraction, silicon gasket, closure with 2 stainless steel screws, mounting flanges: 2 drilled holes Ø 6.5 mm, spacing L2, tilt range: 220°, cable gland: M20, connecting terminal: 6 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), service life L70/B20 > 50.000 h, Beam angle (FWHM): 17° / 87°, luminous flux: 3352 lm, wattage: 60 W, delivered lumens 56 lm/W, protection type IP65, protection class I, impact resistance IK10, windage area 0,1 m<sup>2</sup>, dimensions (L×H×W): 1562 × 54 × 54 mm, weight 5.2 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK10

## Specification

Wattage	60 W	Beam angle (FWHM)	17° / 87°
Delivered lumens	56 lm/W	Housing colour	black RAL 7021
Light source	LED RGBW all colours	Power supply cable	Ø 6 – 13 mm
Lifetime ta 25° C	L70/B20 > 50.000 h	Protection type	IP65
Control gear	DMX	Protection class	I
Input voltage AC	120 – 250 V	Impact resistance	IK10
Input voltage DC	120 – 250 V	Windage area	0,1m <sup>2</sup>
Voltage protection	2 kV L/N   2 kV L/PE	Dimensions	1562 × 54 × 54 mm
Luminaires per B16A / C16A	38 / 38	Weight	5,20 kg
		Max. ambient temperature ta	45°