






## Halogen floodlight

8 537 091 009

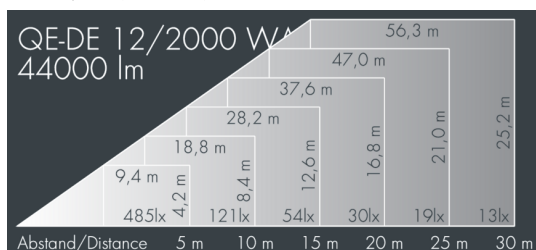

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

unpainted, Colour: unpainted, all exterior parts are stainless steel, closure with 4 stainless steel screws, mounting bracket aluminum: 4 drilled holes  $\varnothing$  9 mm, spacing 70 mm (120 mm), 1 centre hole  $\varnothing$  11 mm, tilt range: 100°, cable gland: PG13,5, connecting terminal: 3 pole, axially symmetrical aluminum reflector, Beam angle (FWHM): 46°, luminous flux: 44000 lm, wattage: 2000 W, delivered lumens 22 lm/W, protection type IP55, protection class I, impact resistance IK08, dimensions (LxHxW): 465 x 185 x 250 mm, weight 5.96 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP55 IK08

## Specification

Wattage	2000 W	Beam angle (FWHM)	46°
Delivered lumens	22 lm/W	Housing colour	unpainted
Control gear	on / off	Power supply cable	$\varnothing$ 5 – 13 mm
		Protection type	IP55
		Protection class	I
		Impact resistance	IK08
		Dimensions	465 x 185 x 250 mm
		Weight	5,96 kg