






## Monospace

8 252 445 049

8 × 11,5 W, 11798 lm, 4000 K neutral white, asymmetrical beam 58°

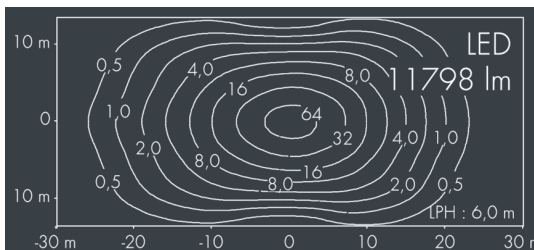

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 2 luminaires for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 2x 8 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral control gear, CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, luminous flux: 11798 lm, wattage: 92 W, delivered lumens 128 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,063 m<sup>2</sup>, dimensions (L×H×W): 924 × 67 × 308 mm, weight 9.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP67 IK08

## Specification

Wattage	92 W	Housing colour	black RAL 7021
Delivered lumens	128 lm/W	Power supply cable	Ø 5 – 14 mm
Light source	LED 4000 K	Protection type	IP67
Color Rendering Index	CRI > 80	Protection class	II
Colour tolerance	3 SCDM	Impact resistance	IK08
Lifetime ta 25° C	L80/B20 > 50.000 h	Windage area	0,063m <sup>2</sup>
Control gear	on / off	Dimensions	924 × 67 × 308 mm
Input voltage AC	220 – 240 V	Weight	9,70 kg
Input voltage DC	220 – 240 V	Max. ambient temperature ta	35°
Voltage protection	4 kV L/N   2 kV L/PE		
Luminaires per B16A / C16A	27 / 46		