
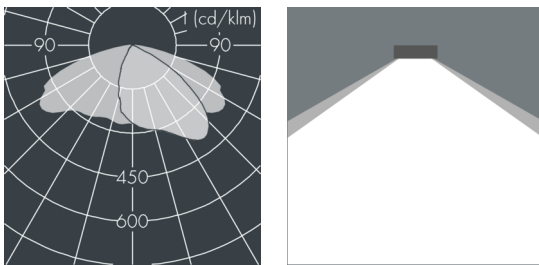


Monospace High Output

8 253 356 059

4 × 20 W, 9082 lm, 3000 K warm white,
lateral wide beam 33° / 148°

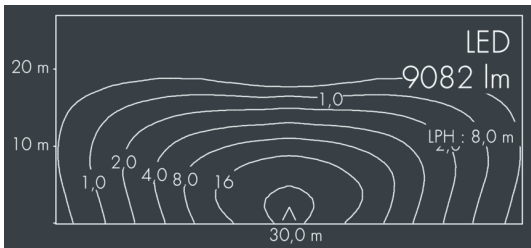

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, with pole top fitter for 1 luminaire for poles Ø 60/76 mm, 3 M8 grub screws, tilt range: 7°, cable gland: M20, with 8 m cable Ho5RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral control gear, CRI > 80, 3 SCDM, service life L80/B20 > 50.000 h, Beam angle (FWHM): 33° / 148°, luminous flux: 9082 lm, wattage: 80 W, delivered lumens 114 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,038 m², dimensions (L×H×W): 362 × 67 × 308 mm, weight 5.4 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

Specification

| | | | |
|----------------------------|-----------------------|-----------------------------|---------------------|
| Wattage | 80 W | Beam angle (FWHM) | 33° / 148° |
| Delivered lumens | 114 lm/W | Housing colour | silver grey |
| Light source | LED 3000 K | Protection type | IP67 |
| Color Rendering Index | CRI > 80 | Protection class | II |
| Colour tolerance | 3 SCDM | Impact resistance | IK08 |
| Lifetime ta 25° C | L80/B20 > 50.000 h | Windage area | 0,038m ² |
| Control gear | on / off | Dimensions | 362 × 67 × 308 mm |
| Input voltage AC | 202 – 254 V | Weight | 5,40 kg |
| Voltage protection | 6 kV L/N 10 kV L/PE | Max. ambient temperature ta | 35° |
| Luminaires per B16A / C16A | 10 / 17 | | |