

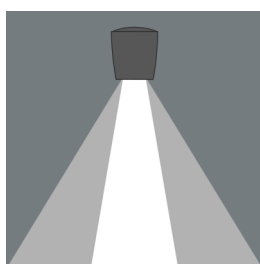




## Monospot 2

8 902 256 189

14 W, 772 lm, 3000 K warm white, DALI,  
Street Optic 41° / 137°

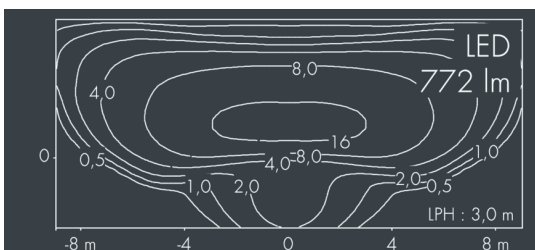

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, lens for batwing light distribution made of highly efficient optical silicon, integral, dimmable driver (DALI), CRI > 70, max 3 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 41° / 137°, luminous flux: 772 lm, wattage: 14 W, delivered lumens 56 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,021 m<sup>2</sup>, dimensions:  $\varnothing$  133 mm, width 153 mm, weight 1.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

## Specification

Wattage	14 W	Beam angle (FWHM)	41° / 137°
Delivered lumens	56 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Power supply cable	$\varnothing$ 5 - 9 mm
Color Rendering Index	CRI > 70	Protection type	IP67
Colour tolerance	max 3 SDCM	Protection class	I
Lifetime ta 25° C	L90/B10 > 50.000 h	Impact resistance	IK08
Control gear	DALI	Windage area	0,021 m <sup>2</sup>
Input voltage AC	220 - 240 V	Dimensions	$\varnothing$ 133 mm, width 153 mm
Input voltage DC	220 - 240 V	Weight	1,90 kg
Voltage protection	2 kV L/N   4 kV L/PE	Max. ambient temperature ta	40°
Luminaires per B16A / C16A	50 / 85		