




Monospot 2

8 906 266 079
15 W, 1038 lm, 3000 K warm white,
linear, rotatable 35° / 8°

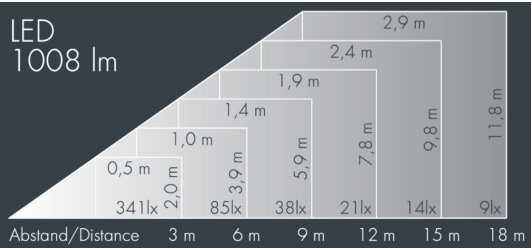

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M16, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 35° / 8°, luminous flux: 1038 lm, wattage: 15 W, delivered lumens 69 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,031 m², dimensions: Ø 133 mm, width 153 mm, weight 1.9 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

Wattage	15 W
Delivered lumens	69 lm/W
Light source	LED 3000 K
Color Rendering Index	CRI > 80
Colour tolerance	max 3 SDCM
Lifetime ta 25° C	L90/B10 > 50.000 h
Control gear	on / off
Input voltage AC	220 – 240 V
Input voltage DC	190
Voltage protection	1 kV L/N 1 kV L/PE
Luminaires per B16A / C16A	50 / 85

Beam angle (FWHM)	35° / 8°
Housing colour	white RAL 9002
Power supply cable	Ø 5 – 9 mm
Protection type	IP67
Protection class	II
Impact resistance	IK08
Windage area	0,031 m²
Dimensions	Ø 133 mm, width 153 mm
Weight	1,90 kg
Max. ambient temperature ta	45°