



## Nanodot flach

8 401 016 089

1.5 W, 162 lm, 3000 K warm white,  
lateral wide beam 30° / 105°

Remote control gear unit essentially required, see  
data sheet with accessories

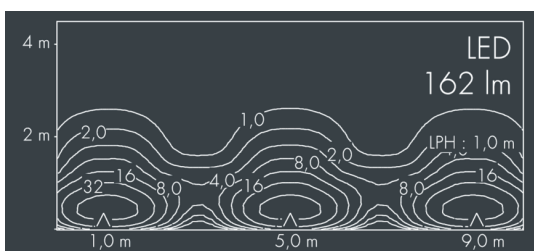

## Specification text

luminaire made of corrosion-resistant stainless steel (V4A), Colour: stainless steel (V4A), all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, installation housing made of fibreglass reinforced plastic, cable gland:

2 x 130 mm FEP single wires and 2 x IP67 silicone-potted pressure clamp connectors, for flush mounting into square flat handrails, suitable for a height of 38 - 45 mm, precise light control with miniature polycarbonate optic, CRI > 80, max 2 SDCM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 30° / 105°, luminous flux: 162 lm, wattage: 1.5 W, delivered lumens 114 lm/W, protection type IP65, protection class III, impact resistance IK10, dimensions: Ø 20 mm, width 17 mm, weight 0.26 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK10

## Specification

Wattage	1.5 W	Beam angle (FWHM)	30° / 105°
Delivered lumens	114 lm/W	Housing colour	stainless steel (V4A)
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	III
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L90/B10 > 50.000 h	Dimensions	Ø 20 mm, width 17 mm
Control gear	on / off / DALI	Weight	0,26 kg
Input voltage DC	2,8 V	Max. ambient temperature ta	40°