





Metaspace

8 215 346 599

6 × 8,6 W, 6529 lm, 3000 K warm white, Zhaga 18 - up / down,

Street Optic 36° / 155°

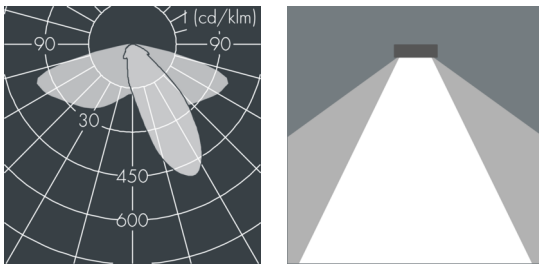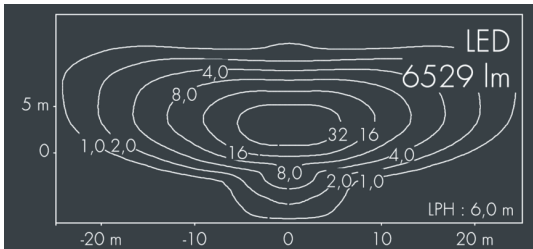

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles \varnothing 60/76 mm, fastening with 4 set screws M8, cable gland: M20, PMMA linsen, integral driver (AC/DC), CRI > 80, 3, service life L80/B20 > 50.000 h, Beam angle (FWHM): 36° / 155°, luminous flux: 6529 lm, wattage: 52 W, delivered lumens 126 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions: \varnothing 376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|-----------------------|-------------------------|-------------------|------------------------------------|
| Wattage | 52 W | Beam angle (FWHM) | 36° / 155° |
| Delivered lumens | 126 lm/W | Housing colour | black RAL 7021 |
| Light source | LED 3000 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | I |
| Colour tolerance | 3 | Impact resistance | IK08 |
| Lifetime ta 25° C | L80/B20 > 50.000 h | Dimensions | \varnothing 376 mm, width 112 mm |
| Control gear | Zhaga 18 - oben / unten | Weight | 5,00 kg |