



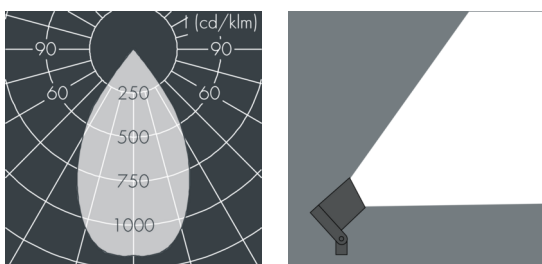

Minispot 2 - 48 V

8 925 045 059

8 W, 604 lm, 4000 K neutral white,
wide beam 59°

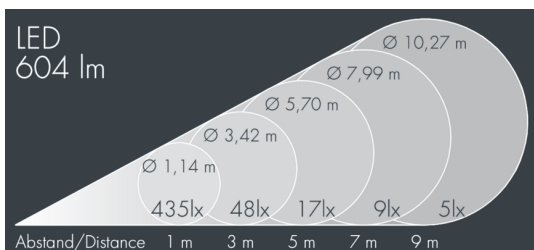

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole \varnothing 7 mm, spacing 18 mm, 1 center hole \varnothing 8.5 mm, tilt range: 185°, cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, Radial louvre, Constant current control (48 V DC), CRI > 80, 3, service life $L_{90/B_{10}} > 50.000$ h, Beam angle (FWHM): 59°, luminous flux: 604 lm, wattage: 8 W, delivered lumens 76 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,01 m², dimensions: \varnothing 80 mm, width 121 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK08

Specification

Wattage	8 W	Beam angle (FWHM)	59°
Delivered lumens	76 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	\varnothing 6 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	3	Protection class	III
Lifetime ta 25° C	$L_{90/B_{10}} > 50.000$ h	Impact resistance	IK08
Control gear	on / off	Windage area	0,01m ²
Input voltage DC	48	Dimensions	\varnothing 80 mm, width 121 mm
		Weight	0,80 kg
		Max. ambient temperature ta	35°