
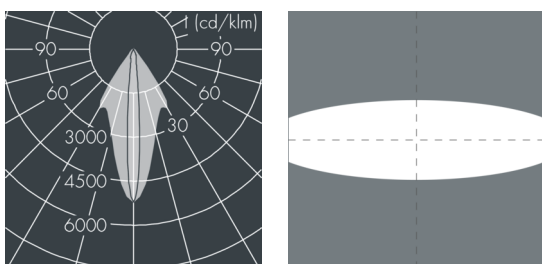


Minispot 2 - 230 V

8 926 067 039

8 W, 484 lm, 2700 K warm white,
linear horizontal 7° / 34°

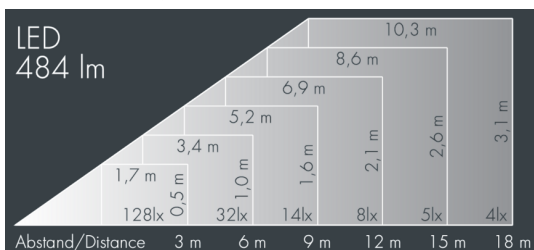

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole \varnothing 7 mm, spacing 18 mm, 1 center hole \varnothing 8.5 mm, tilt range: 185°, cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, Radial louvre, integral driver (230 V AC), CRI > 80, 3, service life $L_{90/B_{10}} > 50.000$ h, Beam angle (FWHM): 7° / 34°, luminous flux: 484 lm, wattage: 8 W, delivered lumens 60 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,01 m², dimensions: \varnothing 80 mm, width 121 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	8 W	Beam angle (FWHM)	7° / 34°
Delivered lumens	60 lm/W	Housing colour	white RAL 9002
Light source	LED 2700 K	Power supply cable	\varnothing 6 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	3	Protection class	I
Lifetime ta 25° C	$L_{90/B_{10}} > 50.000$ h	Impact resistance	IK08
Control gear	on / off	Windage area	0,01m ²
Input voltage DC	48	Dimensions	\varnothing 80 mm, width 121 mm
		Weight	0,80 kg
		Max. ambient temperature ta	35°