
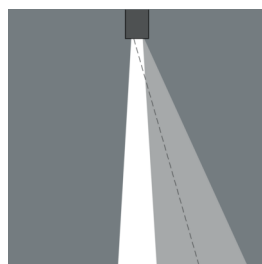
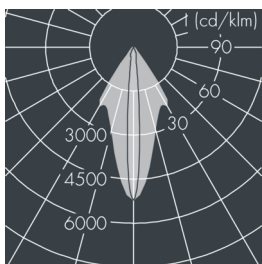


Nanocube

8 308 266 029

5 W, 348 lm, 3000 K warm white,
linear beam spread $34^\circ / 7^\circ$

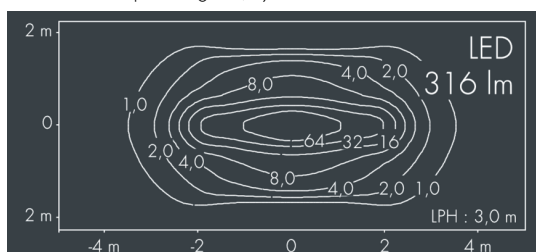

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, housing locked with a grub screw, ceiling mounting: 2 drilled holes $\varnothing 4.5$ mm, spacing 35 mm, cable gland:

cable entry for recessed cable $\varnothing 7-10$ mm, connecting terminal: 3 pole, highly efficient aluminum reflector for linear beam spread, integral driver (AC/DC), CRI > 80, max 3 SDCM, service life $L_{90}/B_{10} > 50.000$ h,

Beam angle (FWHM): $34^\circ / 7^\circ$, luminous flux: 348 lm, wattage: 5 W, delivered lumens 70 lm/W, protection type IP65, protection class I, impact resistance IK07, windage area 0,005 m², dimensions (L×H×W): 66 × 87 × 66 mm, weight 0.57 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK07

Specification

Wattage	5 W	Beam angle (FWHM)	$34^\circ / 7^\circ$
Delivered lumens	70 lm/W	Housing colour	white RAL 9002
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 3 SDCM	Impact resistance	IK07
Lifetime at 25° C	$L_{90}/B_{10} > 50.000$ h	Windage area	0,005m ²
Control gear	on / off	Dimensions	66 × 87 × 66 mm
Input voltage AC	100 – 240 V	Weight	0,57 kg
Voltage protection	1 kV L/N 1 kV L/PE	Max. ambient temperature t_a	45°
Luminaires per B16A / C16A	154 / 154		