




Minispot 2 - 230 V

8 926 045 039

10 W, 584 lm, 4000 K neutral white,
linear horizontal 7° / 34°

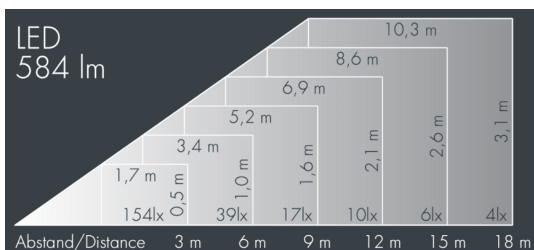

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole \varnothing 7 mm, spacing 18 mm, 1 center hole \varnothing 8.5 mm, tilt range: 185°, cable gland: M20, connecting terminal: 3 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (230 V AC), CRI > 80, max 3 SDCM, service life $L_{90}/B_{10} > 50.000$ h, Beam angle (FWHM): 7° / 34°, luminous flux: 584 lm, wattage: 10 W, delivered lumens 58 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,01 m², dimensions: \varnothing 80 mm, width 121 mm, weight 0.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

Wattage	10 W	Beam angle (FWHM)	7° / 34°
Delivered lumens	58 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	\varnothing 6 – 11 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 3 SDCM	Protection class	I
Lifetime ta 25° C	$L_{90}/B_{10} > 50.000$ h	Impact resistance	IK08
Control gear	on / off	Windage area	0,01m ²
Input voltage AC	220 – 240 V	Dimensions	\varnothing 80 mm, width 121 mm
Voltage protection	5 kV L/N 0 kV L/PE	Weight	0,80 kg
Luminaires per B16A / C16A	95 / 162	Max. ambient temperature ta	35°