




Monospot 3

8 907 255 239

36 W, 2970 lm, 4000 K neutral white, 1-10V, linear, horizontal $9^\circ / 36^\circ$

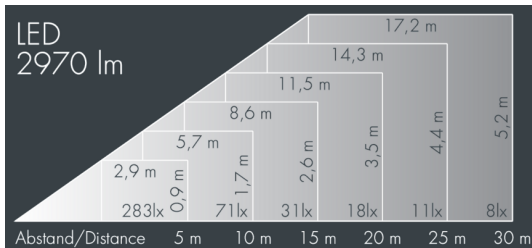

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles $\varnothing 60 - 100$ mm, tiltable base made of powder coated aluminum, 2 drilled holes $\varnothing 9$ mm, spacing 95 mm, 1 centre hole $\varnothing 13,5$ mm, tilt range: $90^\circ, 360^\circ$ adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral driver (dimnable 1-10V), CRI > 80, max 2 SDCM, service life $L_{90}/B_{10} > 50.000$ h, Beam angle (FWHM): $9^\circ / 36^\circ$, luminous flux: 2970 lm, wattage: 36 W, delivered lumens 82 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,049 m², dimensions: $\varnothing 175$ mm, width 200 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



IP67 IK08

Specification

| | | | |
|----------------------------|----------------------------|-----------------------------|------------------------------------|
| Wattage | 36 W | Beam angle (FWHM) | $9^\circ / 36^\circ$ |
| Delivered lumens | 82 lm/W | Housing colour | silver grey |
| Light source | LED 4000 K | Power supply cable | $\varnothing 6 - 13$ mm |
| Color Rendering Index | CRI > 80 | Protection type | IP67 |
| Colour tolerance | max 2 SDCM | Protection class | II |
| Lifetime ta 25° C | $L_{90}/B_{10} > 50.000$ h | Impact resistance | IK08 |
| Control gear | 1-10V | Windage area | 0,049m ² |
| Input voltage AC | 110 – 240 V | Dimensions | $\varnothing 175$ mm, width 200 mm |
| Input voltage DC | 190 – 250 V | Weight | 3,00 kg |
| Voltage protection | 4 kV L/N 5 kV L/PE | Max. ambient temperature ta | 35° |
| Luminaires per B16A / C16A | 30 / 51 | | |