




## Monospot 4

8 904 252 149

46 W, 2786 lm, 2700 K – 6500 K tunable white DALI, medium wide beam 36°

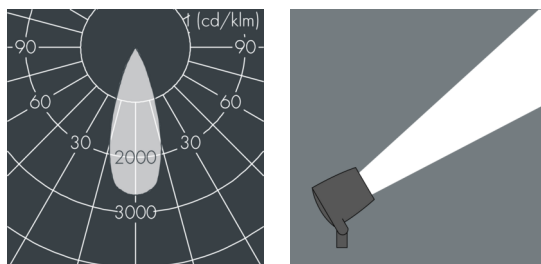

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, Colour: silver grey RAL 9006, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80, Beam angle (FWHM): 36°, luminous flux: 2786 lm, wattage: 46 W, delivered lumens 61 – 76 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,075 m<sup>2</sup>, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

Wattage	46 W	Beam angle (FWHM)	36°
Delivered lumens	61 – 76 lm/W	Housing colour	silver grey RAL 9006
Light source	LED 2700 K – 6500 K	Power supply cable	$\varnothing$ 6 – 13 mm
Color Rendering Index	CRI > 80	Protection type	IP67
Control gear	DALI	Protection class	I
		Impact resistance	IK08
		Windage area	0,075m <sup>2</sup>
		Weight	5,10 kg
		Max. ambient temperature ta	35°