



Nanodot flach

8 401 017 069

1.5 W, 121 lm, 2700 K warm white,
bilateral asymmetrical beam $111^\circ / 75^\circ$
Remote control gear unit essentially required, see
data sheet with accessories

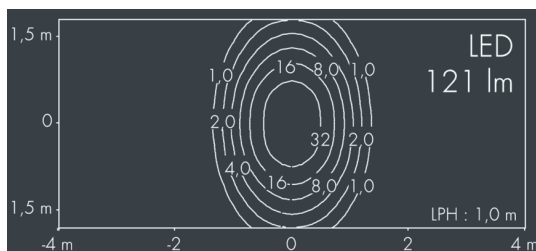

Specification text

luminaire made of corrosion-resistant stainless steel (V4A), Colour: stainless steel (V4A), all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, installation housing made of fibreglass reinforced plastic, cable gland:

2 x 130 mm FEP single wires and 2 x IP67 silicone-potted pressure clamp connectors, for flush mounting into square flat handrails, suitable for a height of 38 - 45 mm, precise light control with miniature polycarbonate optic, CRI > 80, max 2 SDCM, service life $L_{90/B_{10}} > 50.000$ h, Beam angle (FWHM): $111^\circ / 75^\circ$, luminous flux: 121 lm, wattage: 1.5 W, delivered lumens 86 lm/W, protection type IP65, protection class III, impact resistance IK10, dimensions: $\varnothing 20$ mm, width 27 mm, weight 0.26 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK10

Specification

Wattage	1.5 W	Beam angle (FWHM)	$111^\circ / 75^\circ$
Delivered lumens	86 lm/W	Housing colour	stainless steel (V4A)
Light source	LED 2700 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	III
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime to 25° C	$L_{90/B_{10}} > 50.000$ h	Dimensions	$\varnothing 20$ mm, width 27 mm
Control gear	on / off / DALI	Weight	0,26 kg