



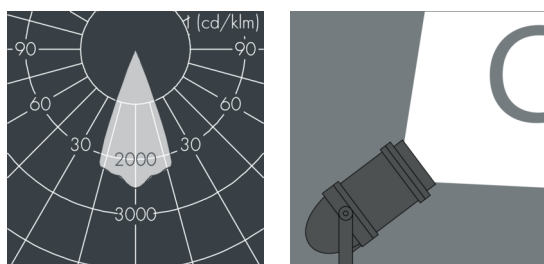

## Nightspot B Gobo Projector

8 987 064 669

55 W, 1724 lm, 6500 K cold white, DALI,  
45 mm focal length 41°

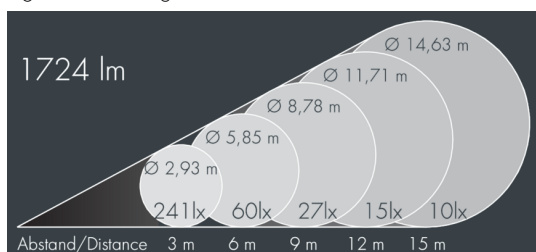

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes  $\varnothing$  9 mm, spacing 70 mm, 1 centre hole  $\varnothing$  22 mm, tilt range: 105°, cable gland: M20, connecting terminal: 5 pole, focusable projection lens for precise light control and sharp-edged image projections, integral, dimmable driver (DALI), CRI > 70, service life L70/B > 50.000 h, Beam angle (FWHM): 41°, luminous flux: 1724 lm, wattage: 55 W, delivered lumens 31 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,085 m<sup>2</sup>, dimensions:  $\varnothing$  240 mm, width 425 mm, weight 8.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

Wattage	55 W	Beam angle (FWHM)	41°
Delivered lumens	31 lm/W	Housing colour	white RAL 9002
Light source	LED 6500 K	Power supply cable	$\varnothing$ 8 – 15 mm
Color Rendering Index	CRI > 70	Protection type	IP67
Lifetime ta 25° C	L70/B > 50.000 h	Protection class	II
Control gear	DALI	Impact resistance	IK08
Input voltage AC	220 – 240 V	Windage area	0,085m <sup>2</sup>
Input voltage DC	220 – 240 V	Dimensions	$\varnothing$ 240 mm, width 425 mm
Voltage protection	2 kV L/N   4 kV L/PE	Weight	8,10 kg
Luminaires per B16A / C16A	23 / 39	Max. ambient temperature ta	35°